



(12)

## EUROPEAN PATENT APPLICATION

(21) Application number : 93300011.9

(51) Int. Cl.<sup>5</sup> : **H04Q 11/04, H04L 12/56**

(22) Date of filing : 04.01.93

(30) Priority : 08.01.92 GB 9200267

(43) Date of publication of application :  
11.08.93 Bulletin 93/32

(84) Designated Contracting States :  
DE ES FR IT SE

(88) Date of deferred publication of search report :  
13.12.95 Bulletin 95/50

(71) Applicant : **GPT LIMITED**  
New Century Park  
P.O. Box 53  
Coventry, CV3 1HJ (GB)

(72) Inventor : **Jeffrey, Mark Timothy**  
71 Jubilee Road,  
Corfe Mullen  
Wimborne, Dorset BH21 3NH (GB)  
Inventor : **Maddern, Thomas Slade**  
38 Cutlers Place,  
Colehill  
Wimborne, Dorset BH21 2HU (GB)  
Inventor : **Proctor, Richard John**  
28 Diprose Road,  
Corfe Mullen  
Wimborne, Dorset BH21 3QY (GB)


(74) Representative : **Branfield, Henry Anthony**  
The General Electric Company, p.l.c.  
GEC Patent Department  
Waterhouse Lane  
Chelmsford, Essex CM1 2QX (GB)

(54) **STM switching arrangement**

(57) An STM telecommunications switch is provided, comprising a plurality of parallel data switching planes and a parallel control plane, each plane having an equal number of input ports and output ports and a central switching unit to switch each input port to any output port and wherein the data is switched in octets.

Fig.2.

### STM OPERATION

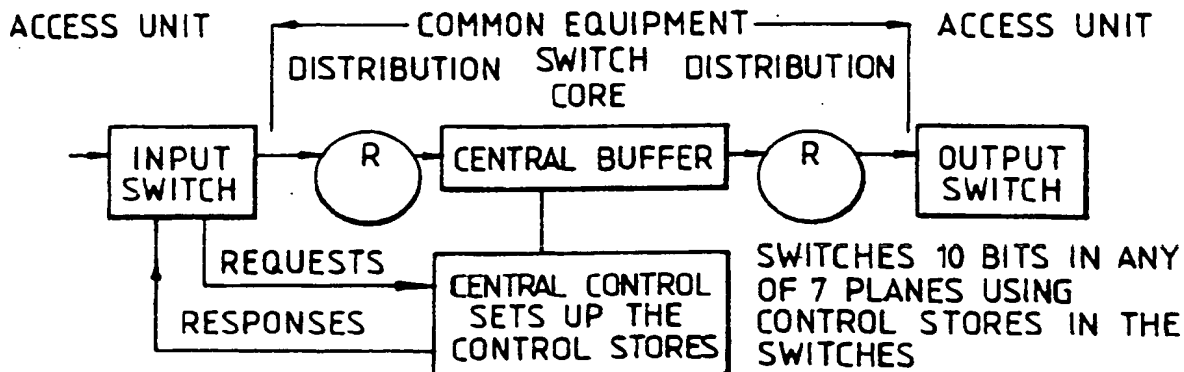



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 93 30 0011

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CLS)
X	EP-A-0 366 263 (GEC PLESSEY) * abstract; claims 1-3,9,10; figures 1,6 * * column 5, line 54 - column 6, line 12 * * column 8, line 48 - line 50 * ---	1-5	H04Q11/04 H04L12/56
A	ISS90, vol.4, 28 May 1990, STOCKHOLM, SE pages 109 - 114, XP130905 PROCTOR ET AL * section 4 * ---	1-5	
A	IEEE JSAC, vol.6, no.9, December 1988, NY, US pages 1556 - 1564, XP4700 SUZUKI ET AL * section 2B; Fig. 3 and 4 * -----	1-5	
			TECHNICAL FIELDS SEARCHED (Int.CLS)
			H04L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 October 1995	Examiner Ali, A
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 01.92 (P04C04)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number : **0 554 969 A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number : **93300011.9**

(51) Int. Cl.<sup>5</sup> : **H04Q 11/04, H04L 12/56**

(22) Date of filing : **04.01.93**

(30) Priority : **08.01.92 GB 9200267**

(43) Date of publication of application :  
**11.08.93 Bulletin 93/32**

(84) Designated Contracting States :  
**DE ES FR IT SE**

(71) Applicant : **GPT LIMITED**  
**New Century Park P.O. Box 53**  
**Coventry, CV3 1HJ (GB)**


(72) Inventor : **Jeffrey, Mark Timothy**  
**71 Jubilee Road, Corfe Mullen**  
**Wimborne, Dorset BH21 3NH (GB)**  
Inventor : **Maddern, Thomas Slade**  
**38 Cutlers Place, Colehill**  
**Wimborne, Dorset BH21 2HU (GB)**  
Inventor : **Proctor, Richard John**  
**28 Diprose Road, Corfe Mullen**  
**Wimborne, Dorset BH21 3QY (GB)**

(74) Representative : **Branfield, Henry Anthony**  
**The General Electric Company, p.l.c. GEC**  
**Patent Department Waterhouse Lane**  
**Chelmsford, Essex CM1 2QX (GB)**

(54) **STM switching arrangement.**

(57) An STM telecommunications switch comprising a plurality of parallel data switching planes and a parallel control plane, each plane having an equal number of input ports and output ports and a central switching unit to switch each input port to any output port and wherein the data is switched in octets.

Fig.2.

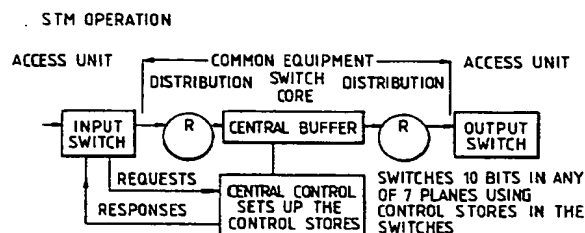

EP 0 554 969 A2

The proposed Broadband - Integrated Services Digital Network (B-ISDN) requires switching of data using the Asynchronous Transfer Mode (ATM) multiplex structure, with all services placed in cells of 53 octets including routing information.

The existing network employs Synchronous Transfer Mode (STM) to carry individual octets along predetermined routes, controlled by stores in the switches.

For these reasons there are three possible strategies for the introduction of ATM based B-ISDN alongside the current STM network:

1) Overlay network.

The addition of an ATM network alongside the existing STM network. B-ISDN services are carried on the overlay, and existing services remain on the STM.

This solution requires major capital investment to introduce ATM at a national level, and there is no guarantee that the service take-up will be sufficient to cover this cost within a reasonable time. This also limits the flexibility of management of the network.

2) Emulation over ATM.

ATM can provide a "circuit emulation" of an STM circuit, and this is often seen as the way to support STM services on an ATM network.

It has been assumed that the existing STM services (e.g. voice) can eventually be carried over the ATM network by adapting the service into the ATM cells. This produces delays for packetisation, and also requires the STM service to be resilient against cell loss, which many services (notably H.261 video) are not yet able to cope with.

Therefore, while this may be possible when ATM is a more mature environment, the services are not yet sufficiently developed to use ATM.

3) Dual mode network.

An arrangement which provides the ability to switch both ATM traffic and STM traffic in the same switch fabric. This avoids the problems above, and has other benefits as well. Accordingly, it is required to make it possible.

According to the present invention there is provided an STM telecommunications switch comprising a plurality of parallel data switching planes and a parallel control plane, each plane having an equal number of input ports and output ports and a central switching unit to switch each input port to any output port and wherein the data is switched in octets.

The invention is of a switch, capable of switching STM traffic in a central core. There are several possible ways to implement such a switch, and one such implementation is referenced below.

The switch provides external ports, each of which is designed to support STM (multiples of 64 kbit/s) traffic.

The switch core is formed of units capable of switching STM octets (using control stores to define the route).

The present invention may be implemented using a switch fabric generally similar to that described and claimed for an ATM Switching Arrangement in United Kingdom Patent Applications Nos. 9116748.6, 9116749.4, 9116750.2, and 9116763.5 which are included herein by reference. These applications give a more detailed description of the construction and operation of the switch.

The present invention will now be described, by way of example, with reference to the accompanying drawings, in which :-

Figure 1 shows a schematic diagram of a switch arrangement for ATM operations; and

Figure 2 shows a schematic diagram of a switch arrangement for STM operation.

The concept of the switch of the present invention is to use the same switch core as has been described in the above identified patent applications for an ATM switch as an STM switch, the same interconnect and core technology being used.

This covers the basic operation of the switch for STM traffic, subsequent sections cover particular subjects in more detail.

The core of the switch described in detail in the above identified patent applications can be used as the space switch in a Time Space Time (TST) based STM switch.

The 7 data planes will be used for switching different data. In the core of the switch the central data switch acts as a simple STM switching device, using a control store for STM switching. Individual ports can operate in either the ATM or the STM mode of operation, or mixed if both functions are provided.

Changing the numbers for the switch so that the cycle time is a simple fraction of the 125 microsecond frame reduces the control store requirements significantly. Operating at a logical rate of around 40M, a cycle time of a quarter of a frame would work with 20 central stages, a cycle of a fifth of a frame (25 microseconds) works with 16 central stages. Growth based on a factor of 16 is easier to understand and the shorter cycle time is attractive.

As an STM switch will be required to carry 10 bits of data (8 data bits, 1 for channel associated signalling, 1 for parity/checking) the capacity would be less than CLOS at these rates. There are two options available, add an eighth data plane or increase the data rate. Increasing the data rate improves ATM transmission as well, so the current design is based on a cycle of a sixth of a frame running at a data rate of 49.152M. The cycle time is at 21 microseconds.

The access units (AUs), for broadband would be different from the STM AUs. For significant cost reasons, there could be two types of STM AUs. The Access Unit-Narrow Band (AUN), which has the full 64K

capability, and a much simpler subset the Access Unit-Cross-Connect (AUC) that only does Synchronous Digital Hierarchy (SDH) switching. The AUN can do SDH switching as well.

In the STM mode of operation the common core provides a space switching capability that supports SDH and 64K switching for 256 ports. The space switching uses the time domain to limit the interconnection required. Because of this use of the time domain, there is a fixed delay across the switch core this depends on the relative position of the ports but ranges from 0 to 25 microseconds. Time switching elements are required at the access units to send data to and from the switch at the appropriate times.

Figure 2 shows the basic principles behind the STM operation as against the ATM operation shown in Figure 1.

The core is common but is used in different ways in the two switches, while the AUs are significantly different for the two types of switches.

The description that follows is for the STM operation, the ATM operation having been covered in the above referenced patent applications.

The switch operates in units of 64K, so for SDH switching 9 control stores will have to be set up for each column to be switched.

To handle basic 64K data 8 switched bits are required. To be able to error detection and appropriate recovery it is desirable to add 1 or 2 extra bits, to carry parity and long time based checking. The core could equally handle 8, 9, or 10 bits of data for STM.

The incoming AU will timeswitch the incoming stream to one of the 7 data streams to the cores, this could be a full double buffered function for timeslot sequence integrity.

The basis of this time switch is to pass the data through the first available opportunity through the core. This timeswitch need not have a long store.

This has a similar function that takes data from the 7 data streams and generates the outgoing data. Again this can be double buffered if required.

The time switch here takes the data when delivered, and then performs the appropriate full frame time switching to deliver the data when required.

cyclically to each timeslot of the central unit.

3. A switch as claimed in Claim 2, further comprising a second rotator means to connect each timeslot of the central switching unit cyclically to each output port.
4. A switch as claimed in Claim 2 or 3, wherein the or each rotator means comprises a single stage of rotators.
5. A switch as claimed in Claim 2 or 3, wherein the or each rotator means comprises multi-stage rotators.

## Claims

1. An STM telecommunications switch comprising a plurality of parallel data switching planes and a parallel control plane, each plane having an equal number of input ports and output ports and a central switching unit to switch each input port to any output port and wherein the data is switched in octets.
2. A switch as claimed in Claim 1, further comprising a rotator means to connect each input port

Fig.1.

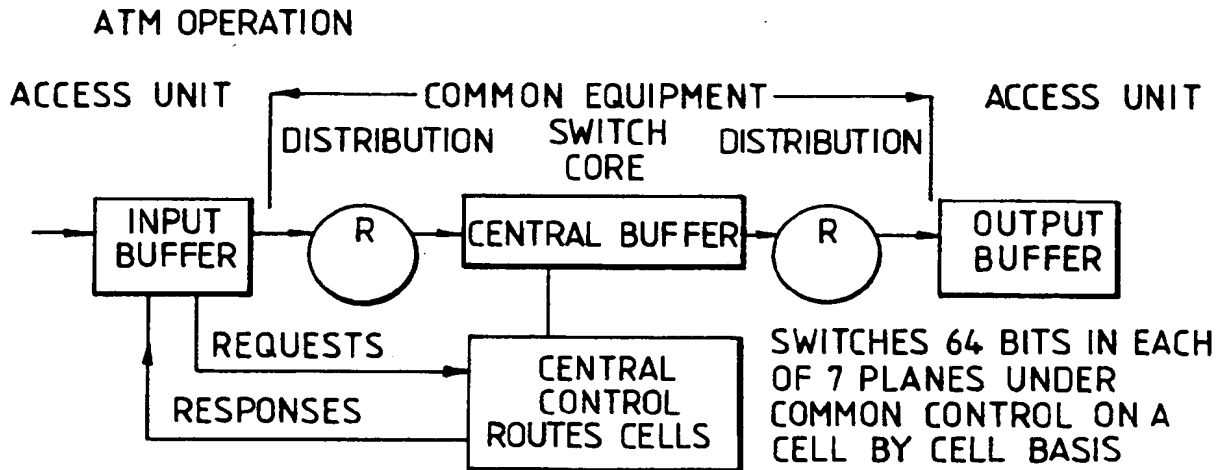


Fig.2.

